Diaphragm Pumps for Air, Gases and Vapours

INNOVATIVE TECHNOLOGY WORLDWIDE







Series LABOPORT® N 840 FT.18, N 840.3 FT.18 Pumps

LABOPORT® Chemicallyresistant Diaphragm Vacuum Pumps

Technical features:

- 100% oil-free transfer
- Pure transfer, evacuation and compression
- Highly compatible with vapours and condensation
- Chemically-resistant
- Therefore suitable for highly aggressive or corrosive gases and vapours
- Maintenance-free
- Environmentally friendly
- Gastight, leakage rate approx. 6 x 10⁻³ mbar x l/s, not tested in serial production.

The chemically-resistant series N 840 and N 840.3 diaphragm pumps are single- and double-head, dry-running devices used in a wide range of laboratory applications. They transfer and pump down without contamination.

The heart of these very compact pumps is a KNF structured diaphragm. This patented diaphragm was stress-optimized using the Finite Elements method. As a result, we were able to make the pumps smaller while increasing the service life of the diaphragm.

Material in contact with the pumped media


Type/Order No.	Pump head	Diaphragm	Valves
N 840 FT.18	PTFE	PTFE-coated	FFPM
N 840.3 FT.18	PTFE	PTFE-coated	FFPM

Technical data:	N 840 FT.18	N 840.3 FT.18	
Delivery (I/min) ¹⁾	34	34	
Ultimate vacuum			
(mbar abs.)	100	8	
Operating pressure			
(bar g)	1	1	
Connectors for tube (mm)	ID 10	ID 10	
Permissible gas and			
ambient temperature	+5+40 °C	+5+40 °C	
Voltage/Frequencies	230V/50Hz	230V/50Hz	
Motor protection	IP 44	IP 44	
Power P ₁	180 W	245 W	
Operating current	1.35 A	1.8 A	
Weight	10.3 kg	12.6 kg	
Dimensions LxHxW (mm)	297/226/171	341/226/166	
With thermal switch and power fuse			

Motors with other voltages and frequencies on request.


Dimensions and performance characteristics

Pump down time for 10 I receiver



KNF reserves the right to make changes.

Performance characteristics

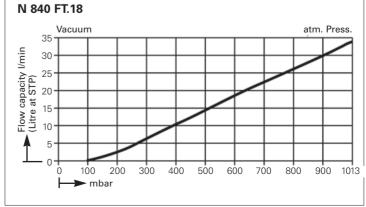


¹⁾ at atm. pressure


Diaphragm Pumps for Air, Gases and Vapours







Performance characteristics

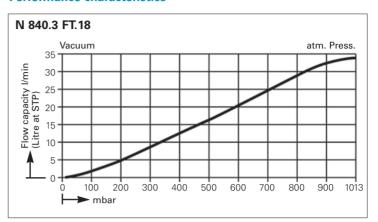

Dimensions (mm)

